


TRANSFORMER TREE-PHASE ISOLATING

Ref : 1T402-AB-M395

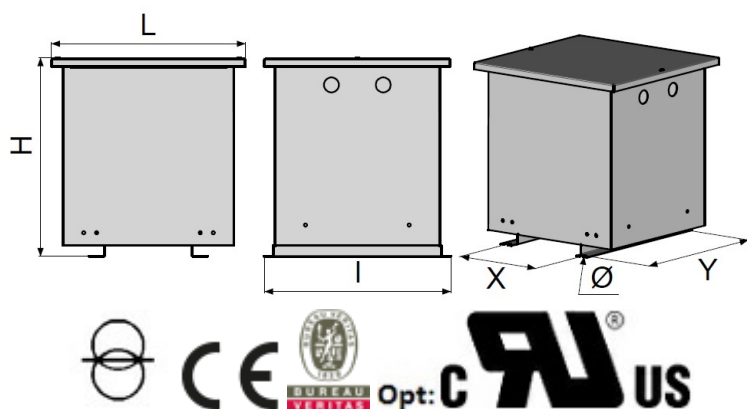

*Dimensions are expressed in millimeters, mass in kilograms and reserves represent the ventilation space to be kept around the product for good heat dissipation. The drawing is not contractual.

Notes and Options

Options: Adjustment taps, Multi-voltages, Electrostatic screen, Reduced inrush current, Low consumption, Resistance to harmonics, Silent block, caster, Integrated protections, reinforced insulation, Tropicalization, Class II, transformer Factor K5, K7, K9 , High frequencies. Additional options for the covered versions: Specific color paint, IP21 to IP55, Built-in case with integrated protections, custom housing possible,

Product Reference	1T402-AB-M395
Product Name	Transformer Tree-Phase Isolating
Title standard	Isolating
Power / Value	4 KVA
Number of phases	Tree-Phase
Input	230V
Output	400V
Coupling	Dyn11
Dimensions (L x l x H)	375 x 360 x 385
Fixing (X x Y x Ø)	250 x (340-104) x 10mm
Weight and space reserve	37 kg x 150mm
Standard(s)	IEC 61558-2-4
Degree of protection	IP21
Winding material	Copper
RoHS compliant	Oui
Insulation class	I
Cooling	Air Naturel
Use frequency	50-60Hz
Temperature rise class	Classe H
Insulating class	H-180 °C
Eyebolts	Yes
Prim / sec dielectric	2500V
Live / ground dielectric	4000V
No load output Voltage	418.9V