


TRANSFORMER THREE-PHASE TO SINGLE-PHASE

Ref : 6B632-TN-T394

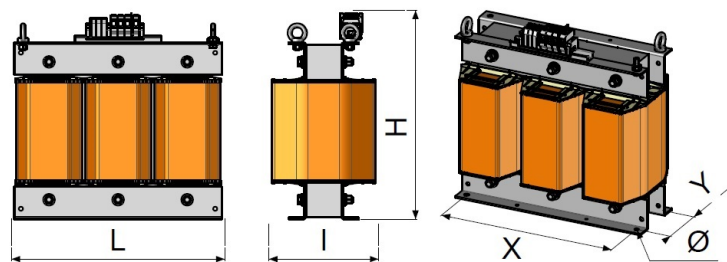

*Dimensions are expressed in millimeters, mass in kilograms and reserves represent the ventilation space to be kept around the product for good heat dissipation. The drawing is not contractual.

Notes and Options

Options: Adjustment taps, Multi-voltages, Electrostatic screen, Reduced inrush current, Low consumption, Resistance to harmonics, Silent block, caster, Integrated protections, reinforced insulation, Tropicalization, Class II, transformer Factor K5, K7, K9 , High frequencies. Additional options for the covered versions: Specific color paint, IP21 to IP55, Built-in case with integrated protections, custom housing possible,

Product Reference	6B632-TN-T394
Product Name	Transformer Three-Phase to Single-Phase
Title standard	Power Dry-type
Power / Value	6.3 KVA
Number of phases	Three-Phase to Single-Phase
Input	400V
Output	230V MONO
Coupling	T-M
Dimensions (L x l x H)	360 x 207 x 377
Fixing (X x Y x Ø)	330 x 110 x 10.5mm
Weight and space reserve	53 kg x 100mm
Standard(s)	IEC 60076-11
Degree of protection	IP00
Winding material	Aluminium
RoHS compliant	Oui
Insulation class	I
Cooling	Air Naturel
Use frequency	50-60Hz
Temperature rise class	Classe H
Insulating class	H-180 °C
Eyebolts	Yes
Prim / sec dielectric	3000V
Live / ground dielectric	3000V
No load output Voltage	137.7V