


TRANSFORMER THREE-PHASE TO SINGLE-PHASE

Ref : 6B403-AB-V895

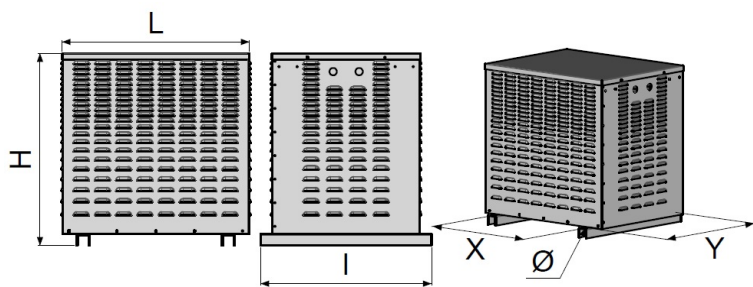

*Dimensions are expressed in millimeters, mass in kilograms and reserves represent the ventilation space to be kept around the product for good heat dissipation. The drawing is not contractual.

Notes and Options

Options: Adjustment taps, Multi-voltages, Electrostatic screen, Reduced inrush current, Low consumption, Resistance to harmonics, Silent block, caster, Integrated protections, reinforced insulation, Tropicalization, Class II, transformer Factor K5, K7, K9, High frequencies. Additional options for the covered versions: Specific color paint, IP21 to IP55, Built-in case with integrated protections, custom housing possible,

Product Reference	6B403-AB-V895
Product Name	Transformer Three-Phase to Single-Phase
Title standard	Power Dry-type
Power / Value	40 KVA
Number of phases	Three-Phase to Single-Phase
Input	400V
Output	230V MONO
Coupling	T-M
Dimensions (L x I x H)	725 x 660 x 750
Fixing (X x Y x Ø)	560 x 610 x 13mm
Weight and space reserve	240 kg x 300mm
Standard(s)	IEC 60076-11
Degree of protection	IP21
Winding material	Aluminium
RoHS compliant	Oui
Insulation class	I
Cooling	Air Naturel
Use frequency	50-60Hz
Temperature rise class	Classe H
Insulating class	H-180 °C
Eyebolts	Yes
Prim / sec dielectric	3000V
Live / ground dielectric	3000V
No load output Voltage	236.6V