


THREE-PHASE AUTOTRANSFORMERS

Ref : 1U202-AB-K573

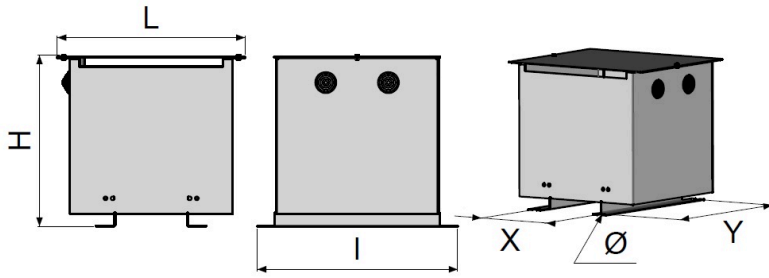

*Dimensions are expressed in millimeters, mass in kilograms and reserves represent the ventilation space to be kept around the product for good heat dissipation. The drawing is not contractual.

Notes et options

Options: Adjustment taps, Multi-voltages, Electrostatic screen, Reduced inrush current, Low consumption, Resistance to harmonics, Silent block, caster, Integrated protections, reinforced insulation, Tropicalization, Class II, transformer Factor K5, K7, K9, High frequencies.

Additional options for the covered versions: Specific color paint, IP21 to IP55, Built-in case with integrated protections, custom housing possible,

Product reference	1U202-AB-K573
Power/Value	2 KVA
IP Indice	IP21
Voltage(s)/Current	400V / 230V
Number of Phases	Three-Phase
Use frequency	50-60Hz
Dimensions (L x l x H)	300 x 320 x 275
Fixings: X x Y x Ø (mm)	145 x (300 - 95) x 10
Weight	14.5
Standard	IEC 61558-2-13
Winding material	Copper
RoHS compliant	Yes
Eyebolts	No
Recommended Electrical Protection Input / Output	/ DJ C - 6A
Dielectric Input/Output and active/ground	/ 3000V