


# THREE-PHASE DRY-TYPE POWER TRANSFORMERS

Ref : 6T502-TN-X046

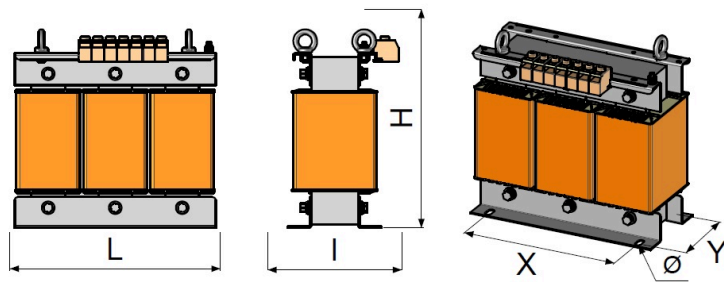

\*Dimensions are expressed in millimeters, mass in kilograms and reserves represent the ventilation space to be kept around the product for good heat dissipation. The drawing is not contractual.

## Notes et options

Options: Adjustment taps, Multi-voltages, Electrostatic screen, Reduced inrush current, Low consumption, Resistance to harmonics, Silent block, caster, Integrated protections, reinforced insulation, Tropicalization, Class II, transformer Factor K5, K7, K9 , High frequencies.

Additional options for the covered versions: Specific color paint, IP21 to IP55, Built-in case with integrated protections, custom housing possible,

Product reference	6T502-TN-X046
Power/Value	5 KVA
IP Indice	IP00
Voltage(s)/Current	230V / 400V
Number of Phases	Three-Phase
Use frequency	50-60 Hz
Coupling	Dyn11
Dimensions (L x l x H)	300 x 166 x 297
Fixings: X x Y x Ø (mm)	250 x (102 - 122) x 10
Weight	36.36
Standard	IEC 60076-11
Winding material	Copper
RoHS compliant	Yes
Temperature rise class	Classe H
Eyebolts	Yes
Recommended Electrical Protection Input / Output	DJ D - 20A / DJ C - 8A
Dielectric Input/Output and active/ground	3000V / 3000V
Insulation class	I
Cooling	Air Naturel