


# THREE-PHASE AUTOTRANSFORMERS

Ref : 1U402-TN-G001

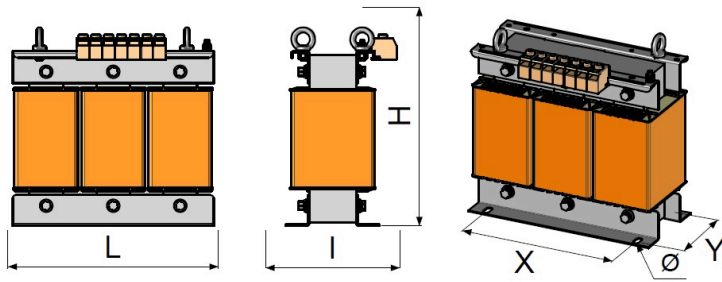

\*Dimensions are expressed in millimeters, mass in kilograms and reserves represent the ventilation space to be kept around the product for good heat dissipation. The drawing is not contractual.

## Notes et options

Options: Adjustment taps, Multi-voltages, Electrostatic screen, Reduced inrush current, Low consumption, Resistance to harmonics, Silent block, caster, Integrated protections, reinforced insulation, Tropicalization, Class II, transformer Factor K5, K7, K9 , High frequencies.

Additional options for the covered versions: Specific color paint, IP21 to IP55, Built-in case with integrated protections, custom housing possible,

Product reference	1U402-TN-G001
Power/Value	4 KVA
IP Indice	IP00
Voltage(s)/Current	230V / 400V
Number of Phases	Three-Phase
Use frequency	50-60Hz
Dimensions (L x l x H)	240 x 126 x 234
Fixings: X x Y x Ø (mm)	200 x (74 - 94) x 10
Standard	IEC 61558-2-13
Winding material	Copper
RoHS compliant	Yes
Temperature rise class	Classe F
Eyebolts	No
Recommended Electrical Protection Input / Output	/ DJ C - 6A
Dielectric Input/Output and active/ground	/ 3000V
Insulation class	I
Cooling	Air Naturel