


THREE-PHASE TO SINGLE PHASE TRANSFORMERS

Ref : 6B633-TN-V894

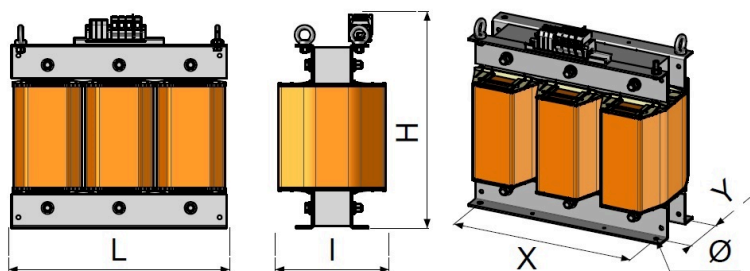

*Dimensions are expressed in millimeters, mass in kilograms and reserves represent the ventilation space to be kept around the product for good heat dissipation. The drawing is not contractual.

| | |
|--|-----------------------------|
| Product reference | 6B633-TN-V894 |
| Power/Value | 63 KVA |
| IP Indice | IP00 |
| Voltage(s)/Current | 400V / 230V MONO |
| Number of Phases | Three-Phase to Single-Phase |
| Use frequency | 50-60Hz |
| Coupling | T-M |
| Standard | IEC 60076-11 |
| Winding material | Aluminium |
| RoHS compliant | Yes |
| Temperature rise class | Classe H |
| Recommended Electrical Protection Input / Output | DJ D - 200A / DJ C - 300A |
| Dielectric Input/Output and active/ground | 3000V / 3000V |
| Insulation class | I |
| Cooling | Air Naturel |